


DATA SHEET

CABLE PULLING SLEEVE RTG 6 MM THREAD

for cable Ø 4 - 13 mm

Item no.: 20365 | 20366 | 20367

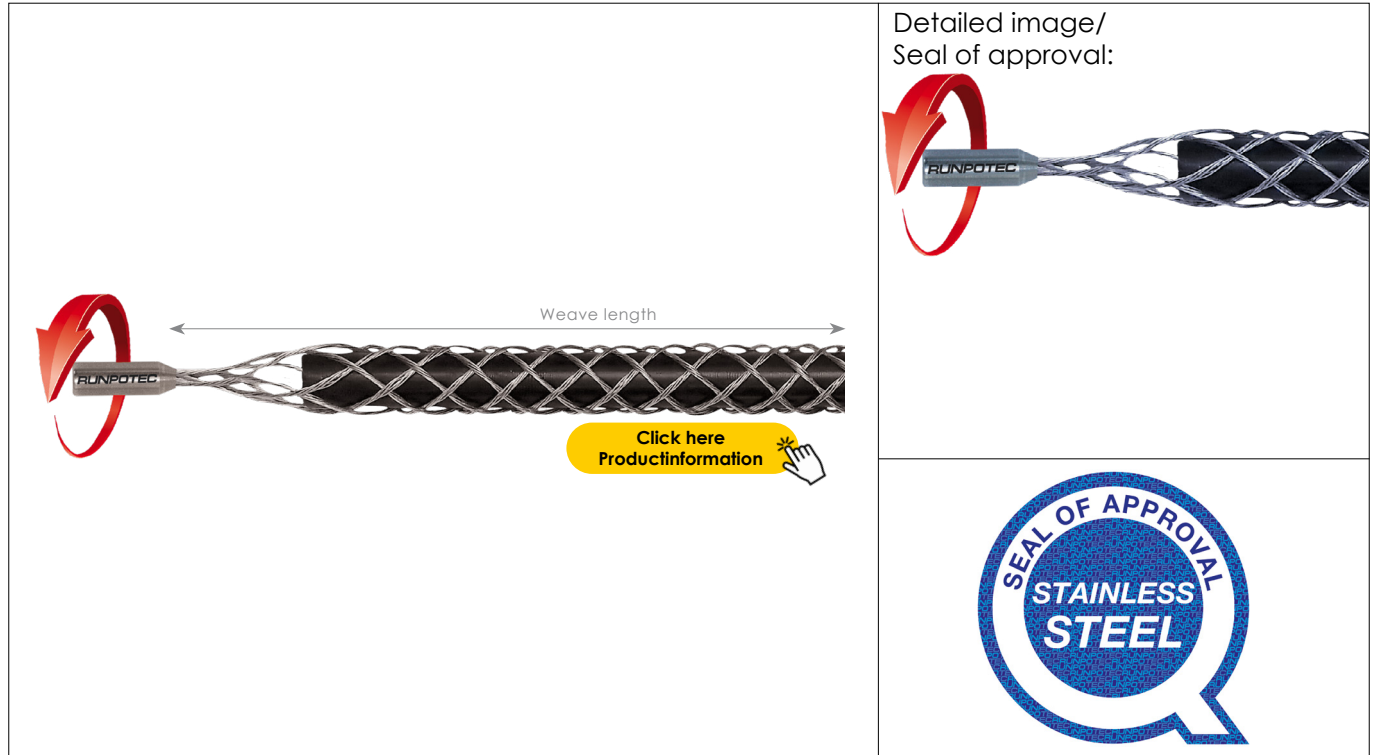

DATA

ITEM NO.	20365	20366	20367
Ø mm	4 - 6 mm	6 - 9 mm	9 - 13 mm
WEAVE LENGTH MM	200	220	320
TOTAL WEIGHT KG	0,01 kg	0,01 kg	0,01 kg
TOTAL BREAKING LOAD	130 kg	180 kg	180 kg
MATERIAL	steel wire braiding		
EAN-CODE	9120045474114	9120045474121	9120045474138

DESCRIPTION

Cable pulling sleeve with RUNPOTEC RTG Ø 6 mm thread including twist compensation. Made of flexible, stainless steel wire mesh. The built-in twist compensation allows the cable to turn in the pipe, thus preventing the thread from unscrewing. High quality materials with a long service life! Compatible with POWER REX, RunpoSticks and glass fibre rods Ø 4.5 mm and Ø 6 mm.

Scope of delivery:

1 piece 4 - 6 mm cable pulling sleeve with RTG Ø 6 mm thread or
1 piece 6 - 9 mm cable pulling sleeve with RTG Ø 6 mm thread or
1 piece 9 - 13 mm Cable pulling sleeve with RTG Ø 6 mm thread

VORTEILE

- incl. twist adjustment
- Tensile load up to 120 kg
- flexible stainless steel wire braiding
- Extremely long service life
- Stainless steel
- Highest quality materials“

INFORMATION

Use with:

POWER REX

Length 20 m | 30m | 40 m | 50 m
Item no.: 10087 - 10090

[Click here Productinformation](#)

Fibreglass rod Ø 4,5 / 6 mm

Length 30 up to 80 meter.

[Click here Productinformation](#)

RUNPOSTICKS

Paket: Comfort | Standard
Item no.: 10020 | 10016


[Click here Productinformation](#)

DATA SHEET

CABLE PULLING SLEEVE WITH LOOP

for cable Ø 4 - 13 mm

Item no.: 30039 | 30040 | 30041

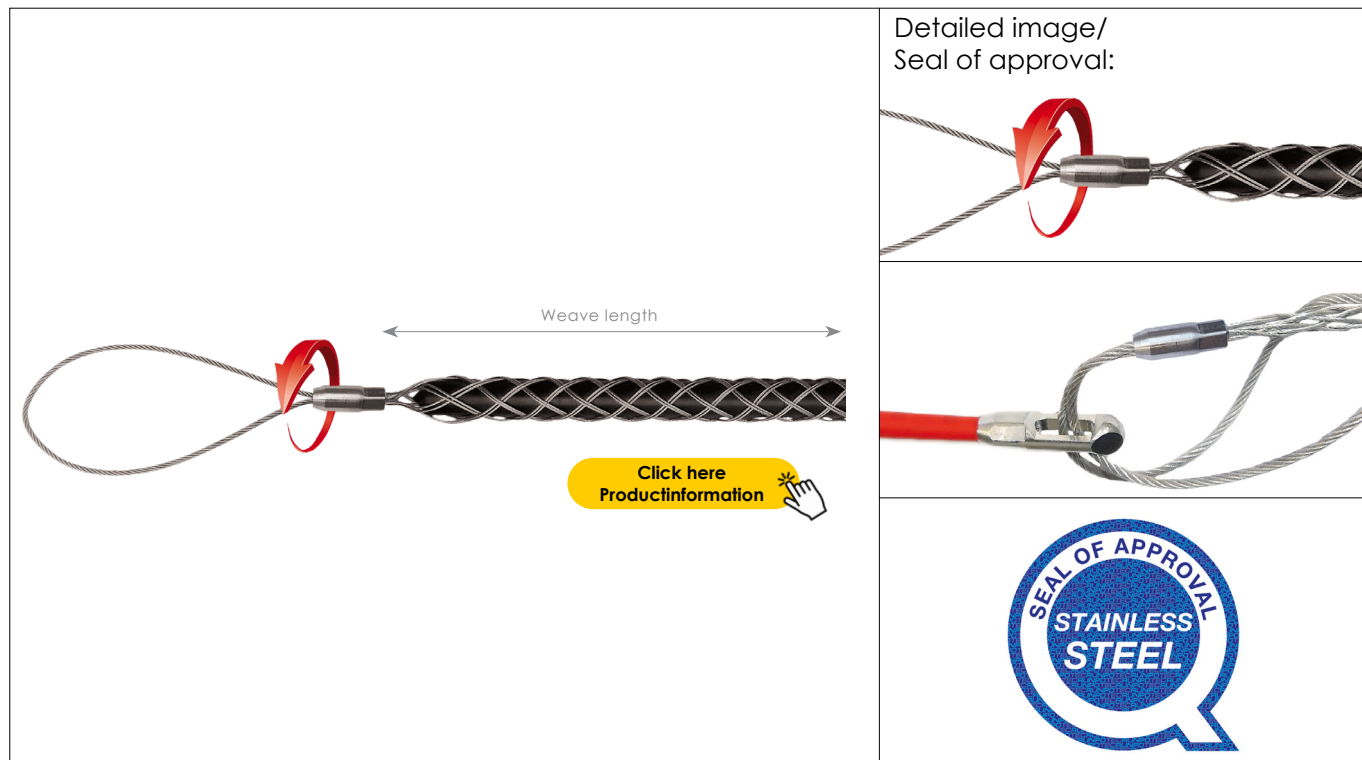

DATA			
ITEM NO.	30039	30040	30041
Ø mm	4 - 6 mm	6 - 9 mm	9 - 13 mm
WEAVE LENGTH MM	270	290	390
TOTAL WEIGHT KG	0,011	0,07	0,08 kg
TENSILE LOAD	200 kg	200 kg	200 kg
MATERIAL	Steel wire braiding		
EAN-CODE	9120045472158	9120045472165	9120045472172

ADVANTAGES

- incl. twist adjustment
- Tensile load up to 200 kg
- flexible stainless steel wire braiding
- Extremely long service life
- Stainless steel
- Highest quality materials

INFORMATION

Use with:

RUNPO 1

Length 5 - 30 m
Item no.: 30027 -30043

POWER REX

Length 20 m | 30m | 40 m | 50 m
Item no.: 10087 - 10090

Fibreglass rod Ø 4,5/6/7,5/9/11 mm

Length 30 up to 300 Meter

RUNPOSTICKS

Paket: Comfort | Standard
Item no.: 10020 | 10016

DESCRIPTION

Cable pulling sleeve with loop including twist compensation. Made of flexible stainless steel wire mesh. The built-in twist compensation allows the cable to rotate in the pipe. Through loop-in technology - very slim connection variant! High quality materials with a long service life! Compatible with POWER REX, RUNPOSTICKS and glass fibre rods Ø 4.5 / 6 mm. Can generally be looped into all eyelets.

Scope of delivery:

- 1 piece 4 - 6 mm cable pulling sleeve with loop or
- 1 piece 6 - 9 mm cable pulling sleeve with loop or
- 1 piece 9 - 13 mm cable pulling sleeve with loop

DATA SHEET

CABLE PULLING SLEEVE - LOOP AND THREAD

for cable Ø 9 - 31 mm

Item no.: 20266 | 20267 | 20268 | 20269



DATA				
ITEM NO.	20266	20267	20268	20269
Ø mm	9 - 15	15 - 19	19 - 25	25 - 31
WEAVE LENGTH MM	430	480	480	530
TOTAL WEIGHT KG	0,012	0,012	0,014	0,016
TENSILE LOAD	180 kg	180 kg	180 kg	180 kg
MATERIAL	Steel wire braiding			
EAN-CODE	9120045473728	9120045473735	9120045473742	9120045473759

ADVANTAGES

- incl. twist adjustment
- Tensile load up to 180 kg
- flexible stainless steel wire braiding
- Extremely long service life
- Stainless steel
- Highest quality materials

DESCRIPTION

Cable pulling sleeve with loop and RUNPOTEC RTG Ø 6 mm thread including twist compensation. Made of flexible stainless steel wire mesh. The built-in twist compensation allows the cable to turn in the pipe, thus preventing the thread from unscrewing.

Could also be looped in.

Highest quality materials with a long service life! Compatible with POWER REX, RUNPOSTICKS and glass fibre rods Ø 4.5 / 6 / 7.5 / 9 and 11 mm.

Scope of delivery:

1 piece 9 - 15 mm cable pulling sleeve with loop and thread or
1 piece 15 - 19 mm cable pulling sleeve with loop and thread or
1 piece 19 - 25 mm cable pulling sleeve with loop and thread or
1 piece 25 - 31 mm cable pulling sleeve with loop and thread

INFORMATION

Use with:

RUNPO 1

Length 5 - 30 m
Item no.: 30027 - 30043

POWER REX

Length 20 m | 30 m | 40 m | 50 m
Item no.: 10087 - 10090

Fiberglass rod Ø 4,5/6/7,5/9/11 mm

Length 30 up to 300 Meter

RUNPOSTICKS

Paket: Comfort | Standard
Item no.: 10020 | 10016

DATA SHEET

CABLE PULLING SLEEVE - LOOP AND THREAD

for cable Ø 30 - 100 mm

Item no.: **20436** | **20437** | **20438** | **20439** | **20440** | **20441**



Detailed image/
Seal of approval:

Cross section

RTG Ø 12 mm RTG Ø 6 mm

DATA

ITEM NO.	20436	20437	20438	20439	20440	20441
Ø mm	30 - 40	40-50	50-60	60-70	70-85	85-100
WEAVE LENGTH MM	920	1020	1120	1220	1320	1420
TOTAL WEIGHT KG	0,38	0,40	0,47	0,505	0,56	0,61
TENSILE LOAD	1200	1200	1200	1200	1200	1200
MATERIAL	Steel wire braiding					
EAN-CODE	see www.runpotec.com					

DESCRIPTION

Cable pulling sleeve with loop and RUNPOTEC RTG Ø 12 mm and RTG 6 mm thread including twist compensation. Made of flexible stainless steel wire mesh. The built-in twist compensation allows the cable to turn in the pipe, thus preventing the thread from unscrewing. Can also be looped in. Highest quality materials with a long service life! Compatible with RUNPOTEC RTG Ø 12 mm and RTG Ø 6 mm thread. Preferably in combination with glass fibre rods.

Information in combination with the CW 800 E capstan winch:

RUNPOTEC recommends the use of cable pulling sleeves with loop Art. No. 20661 - 20670 in combination with the CW 800 E capstan winch or the pulling ropes in combination with the connecting swivel with twist compensation Art.No. 10176.

Scope of delivery:

1 piece 30 - 40 mm cable pulling sleeve with loop and thread or
1 piece 40 - 50 mm cable pulling sleeve with loop and thread or
1 piece 50 - 60 mm cable pulling sleeve with loop and thread or
1 piece 60 - 70 mm cable pulling sleeve with loop and thread or
1 piece 70 - 85 mm cable pulling sleeve with loop and thread or
1 piece 85 - 100 mm cable pulling sleeve with loop and thread

ADVANTAGES

- incl. twist adjustment
- Tensile load up to 1200 kg
- flexible stainless steel wire braiding
- Extremely long service life
- Stainless steel
- Highest quality materials

INFORMATION

Use with:

Fibreglass rod

Ø 4,5/6/7,5 /9/11 mm

Length 30 up to 300 Meter

Click here
Productinformation

