


SIDE OPERATED SWITCHES POLYCARBONATE ENCLOSED 16 A



- IP 65
- Fully rated Load Break Switch
- Good resistance against UV and many chemicals
- Cable entries 2 x M20 as standard on the top and bottom and 2 x M20 on the base
- 2 x M20 cable glands included
- Mounting holes: 64,0 x 90,0
- Large cable terminals 1,5 - 16 mm²
- Padlockable handle
- Available in grey, yellow/red (Y/R), red (R)
- Available 2, 3, 4P and with auxiliary contact
- Neutral and earth terminals on 3P switch, earth on 2P and 4P switches

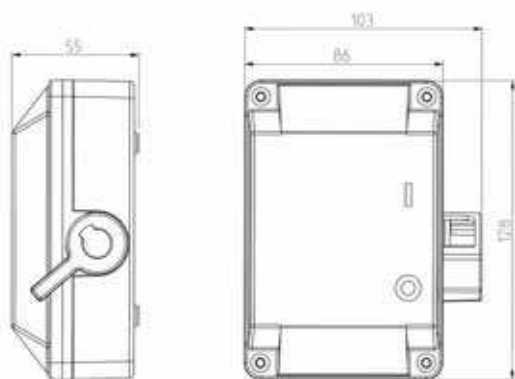

Type	AC-21 / 415 V	AC-22 / 415 V	AC-23 / 415 V	Poles	Description	EAN-Code	Weight
KSM 216	16 A	16 A	16 A	2P	Grey	6419410 328217	0,22
KSM 316				3P		6419410 328200	0,29
KSM 416				4P		6419410 328224	0,29
KSM 316S				3P + auxiliary contact		6419410 328231	0,32
KSM 216 Y/R	16 A	16 A	16 A	2P	Yellow/Red	6419410 328170	0,22
KSM 316 Y/R				3P		6419410 328163	0,29
KSM 416 Y/R				4P		6419410 328187	0,29
KSM 316S Y/R				3P + auxiliary contact		6419410 328194	0,32
KSM 216 R	16 A	16 A	16 A	2P	Red	6419410 328255	0,22
KSM 316 R				3P		6419410 328248	0,29
KSM 416 R				4P		6419410 328262	0,29
KSM 316S R				3P + auxiliary contact		6419410 328279	0,32